"KENGURU PRO" LTD
Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

D-10 Kenguru INDOOR

SCALE 1:50

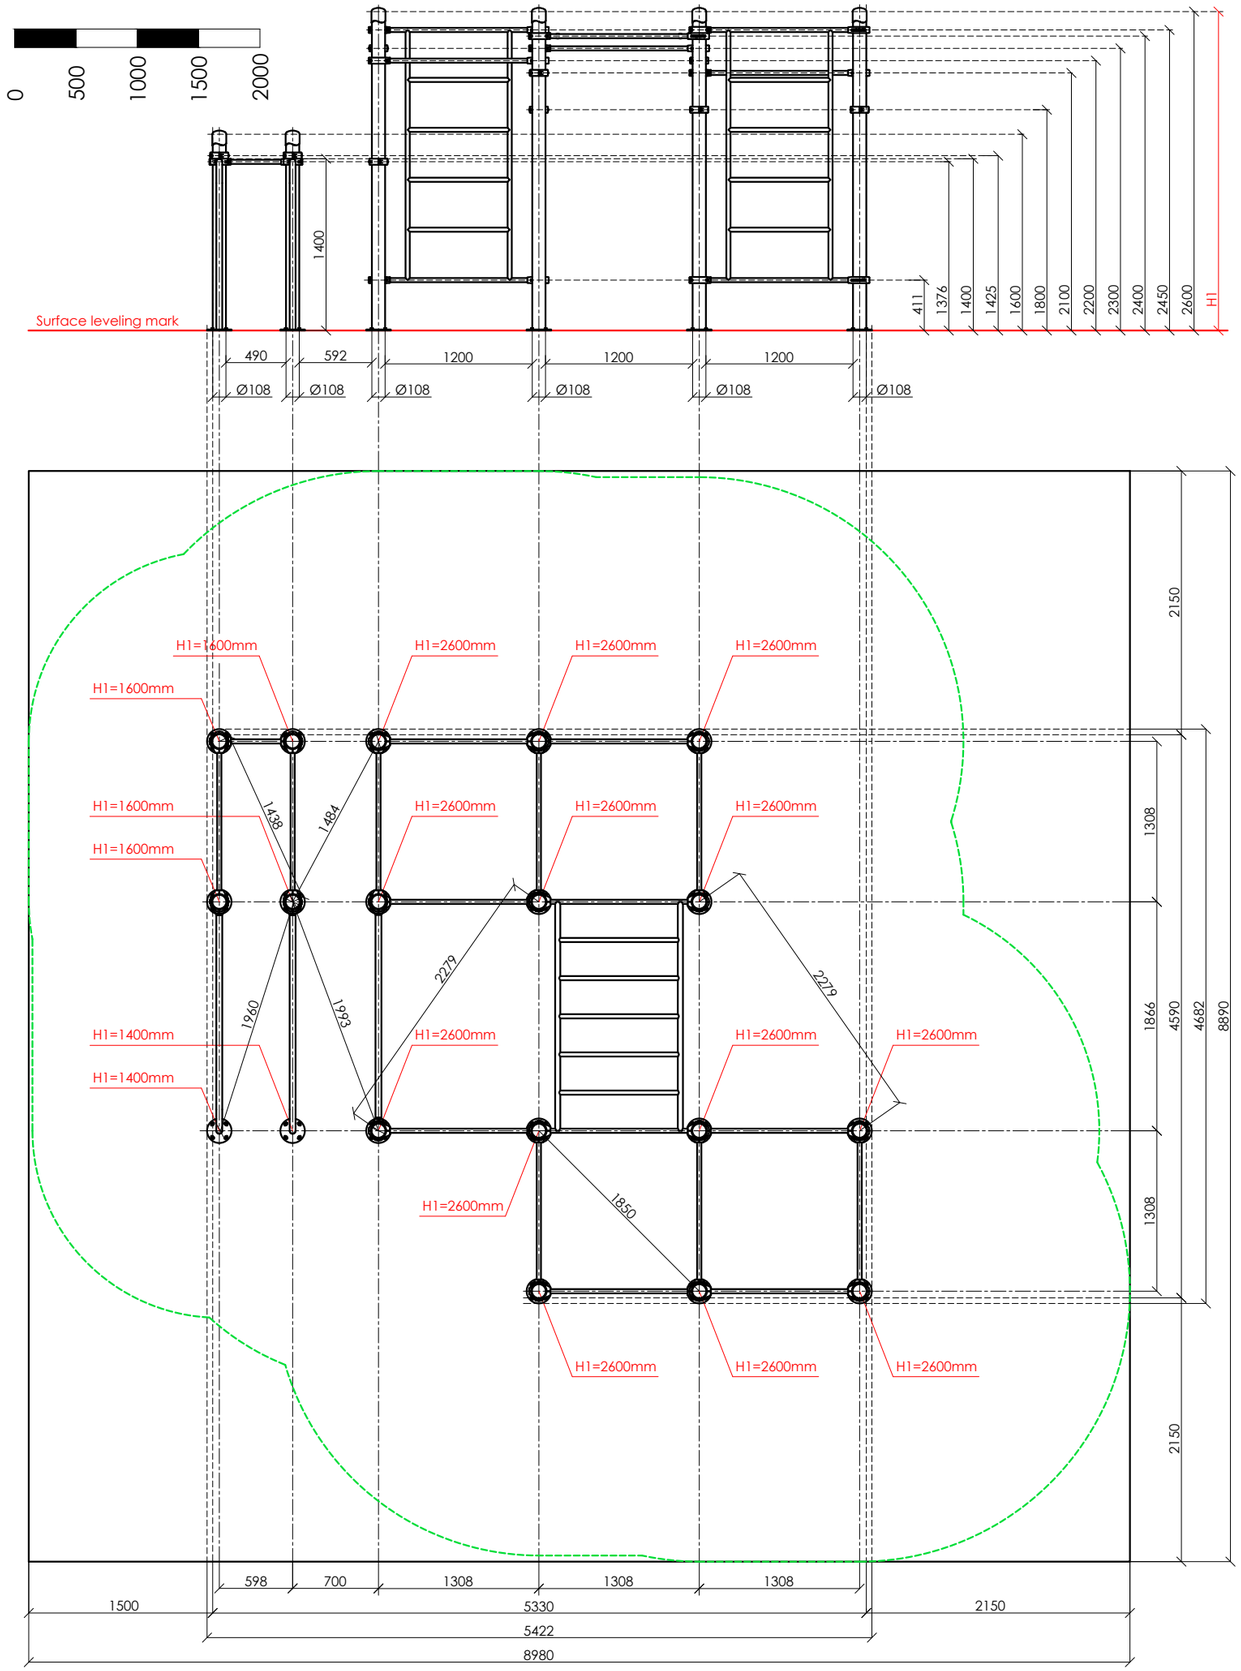

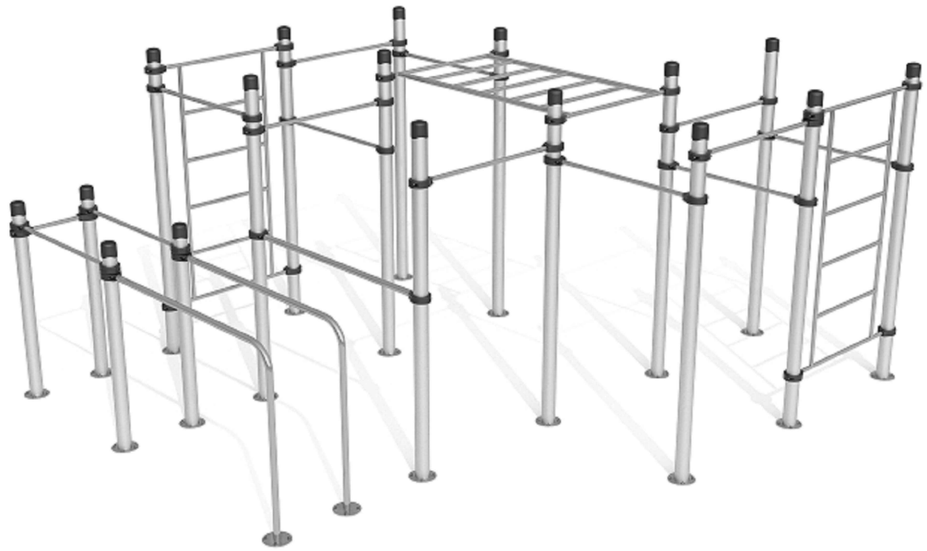

The complex consists of seventeen vertical columns with different height, one crossbar 490 mm in length, thirteen crossbars 1200 mm in length, one crossbar 1758 mm in length, two curved bars, two Swedish wall, monkey bar section and one hook. Height of the Swedish wall – 2073 mm, width – 1200 mm. The distance between the crossbars of the Swedish wall – 407 mm. Monkey bar section length is 1900 mm. The distance between the crossbars of the monkey bar is 311 mm. The distance between the curved bars is 598 and 700 mm accordingly. The horizontal surface of bars is 1590 mm in length. Bars are curved on one side at the angle of 90 degrees and create the parallel bars at the height of 1400 mm from the foundations. Construction is secured together with siluminium clamps.

Technical information

width:	4590 mm	
height:	2650 mm	
lenght:	5330 mm	
largest part:	2650 mm	
weight:	327.1 kg	
floor space required	8980x 8890 mm	
pipe measurements:	diameter:	wall thickness:
	108 mm	3.0 mm
	48.3 mm	3.0 mm
	42.4 mm	3.0 mm
	33.7 mm	3.0 mm
columns Ø108mm:	anodized aluminium profiled pipe AW-6060, powder coated RAL 9006 (White aluminium)	
elements:	stainless steel AISI 304, brushed finish	
metal clamps:	siluminium, powder coated, RAL 9005 (pure black)	
bolts for metal clamps	stainless steel, Pin Hex Button Head Security bolts M10	
max. free fall height:	< 2450 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
user height:	> 140 cm	
maximum user weight:	130 kg	
certificates:		