SCALE 1:50

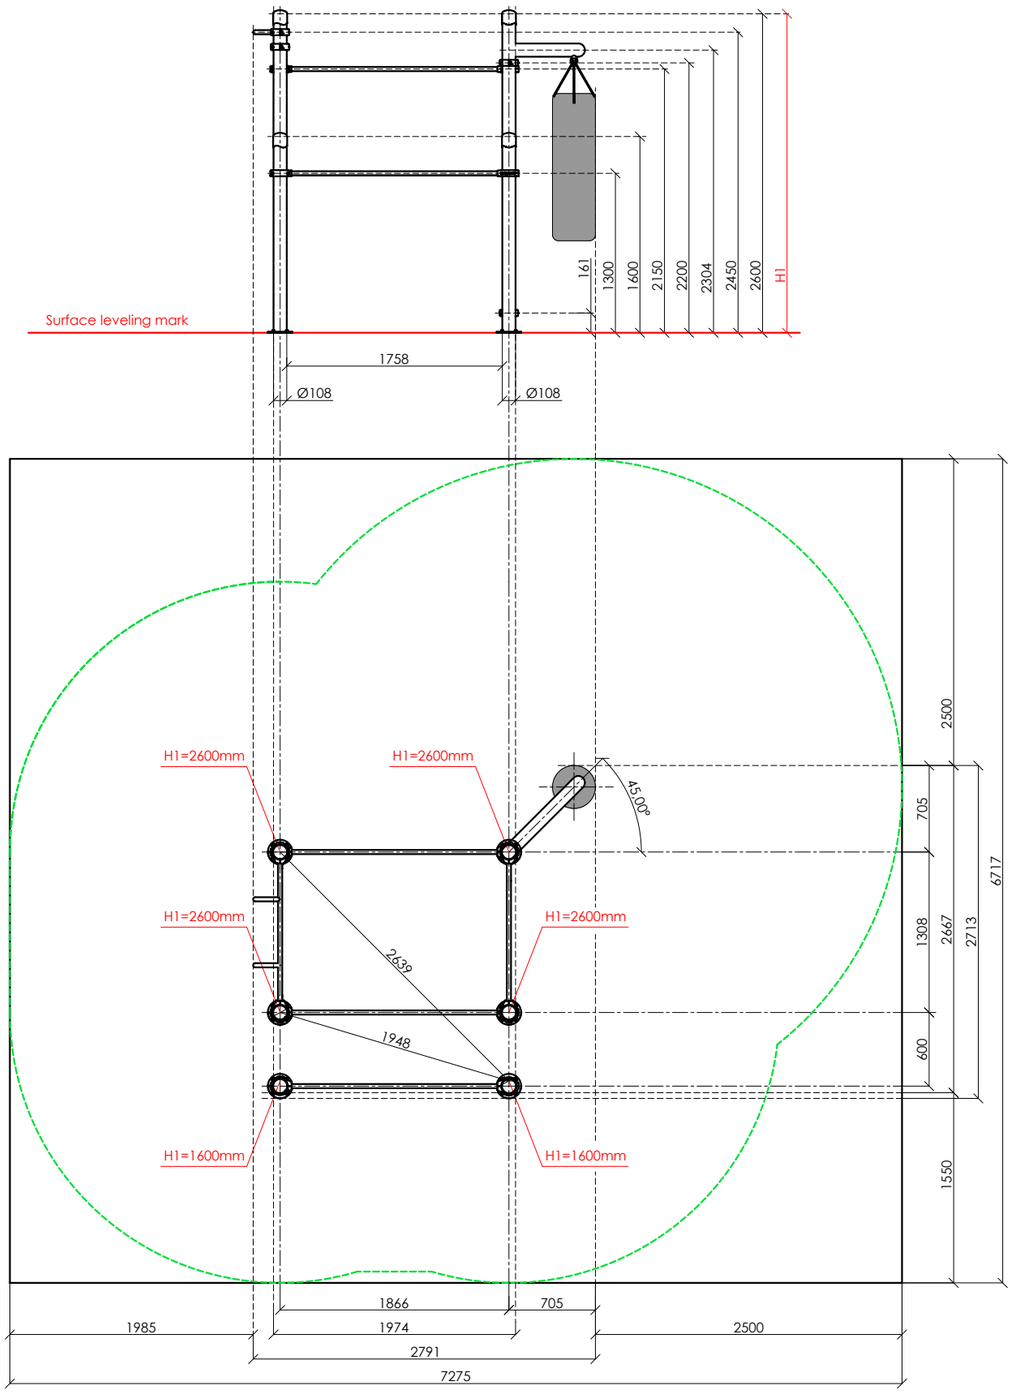

"KENGURU PRO" LTD
Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

D-11 Kenguru INDOOR

The complex consists of six vertical columns of different height, one crossbar 1758 mm in length, a hammer bar, a pair of parallel bars and a Swedish wall. The complex includes a heavy boxing bag. Height of the Swedish wall – 2073 mm. The distance between the crossbars of the Swedish wall – 407 mm. Construction is secured together with siluminium clamps.

Technical information

width:	2791 mm	
height:	2650 mm	
lenght:	2667 mm	
largest part:	2650 mm	
weight:	167.7 kg	
floor space required	7275 x 6717 mm	
pipe measurements:	diameter:	wall thickness:
	108 mm	3.0 mm
	108 mm (Steel)	3.2 mm
	48.3 mm	3.0 mm
	42.4 mm	3.0 mm
	33.7 mm	3.0 mm
columns Ø108mm:	anodized aluminium profiled pipe AW-6060, powder coated RAL 9006 (White aluminium)	
columns Ø108mm with console:	steel, galvanized, powder coated RAL 7016 (anthracite grey)	
elements:	stainless steel AISI 304, brushed surface	
metal clamps:	siluminium, powder coated, RAL 9005 (pure black)	
bolts for metal clamps	stainless steel, Pin Hex Button Head Security bolts M10	
max. free fall height:	< 2450 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
user height:	> 140 cm	
maximum user weight:	130 kg	
certificates:		