SCALE 1:40

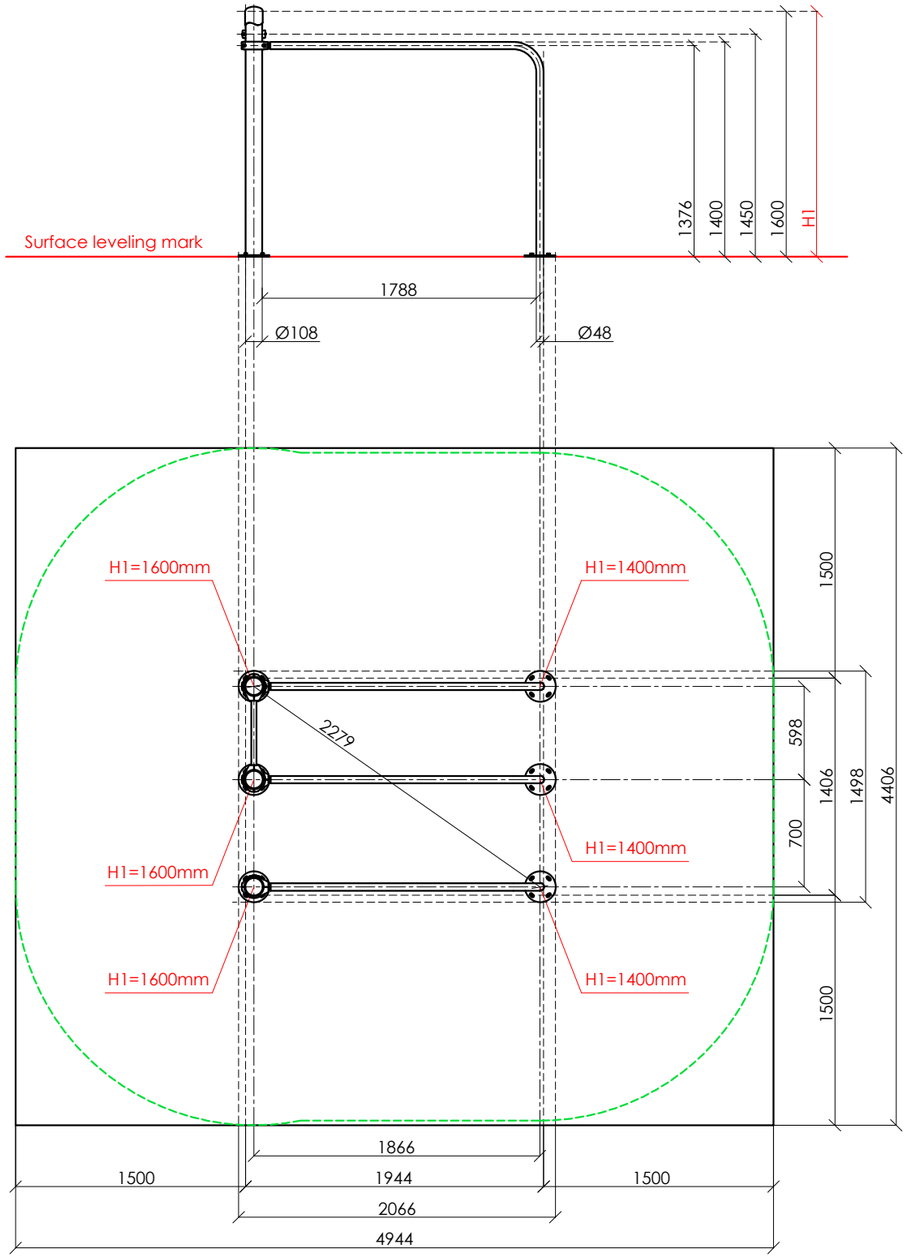

"KENGURU PRO" LTD
Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

D-001 Kenguru INDOOR

The construction consists of three columns, one crossbar 490 mm in length and three curved bars that are placed parallel. The distance between the bars is 598 and 700 mm accordingly. The length of the bars is 1836mm. Bars are curved on one side at the angle of 90 degrees and create the construction with the height of 1400 mm from the foundations. Construction is secured together with siluminium clamps.

Technical information

width:	1406 mm	
height:	1650 mm	
lenght:	1944 mm	
largest part:	1902 mm	
weight:	65.8 kg	
floor space required	4944 x 4406 mm	
pipe measurements:	diameter:	wall thickness:
	108 mm	3.0 mm
	48.3 mm	3.0 mm
	33.7 mm	3.0 mm
columns Ø108mm:	anodized aluminium profiled pipe AW-6060, powder coated RAL 9006 (White aluminium)	
elements:	stainless steel AISI 304, brushed finish	
metal clamps:	siluminium, powder coated, RAL 9005 (pure black)	
bolts for metal clamps	stainless steel, Pin Hex Button Head Security bolts M10	
max. free fall height:	< 1400 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
user height:	> 140 cm	
maximum user weight:	130 kg	
certificates:		