SCALE 1:50

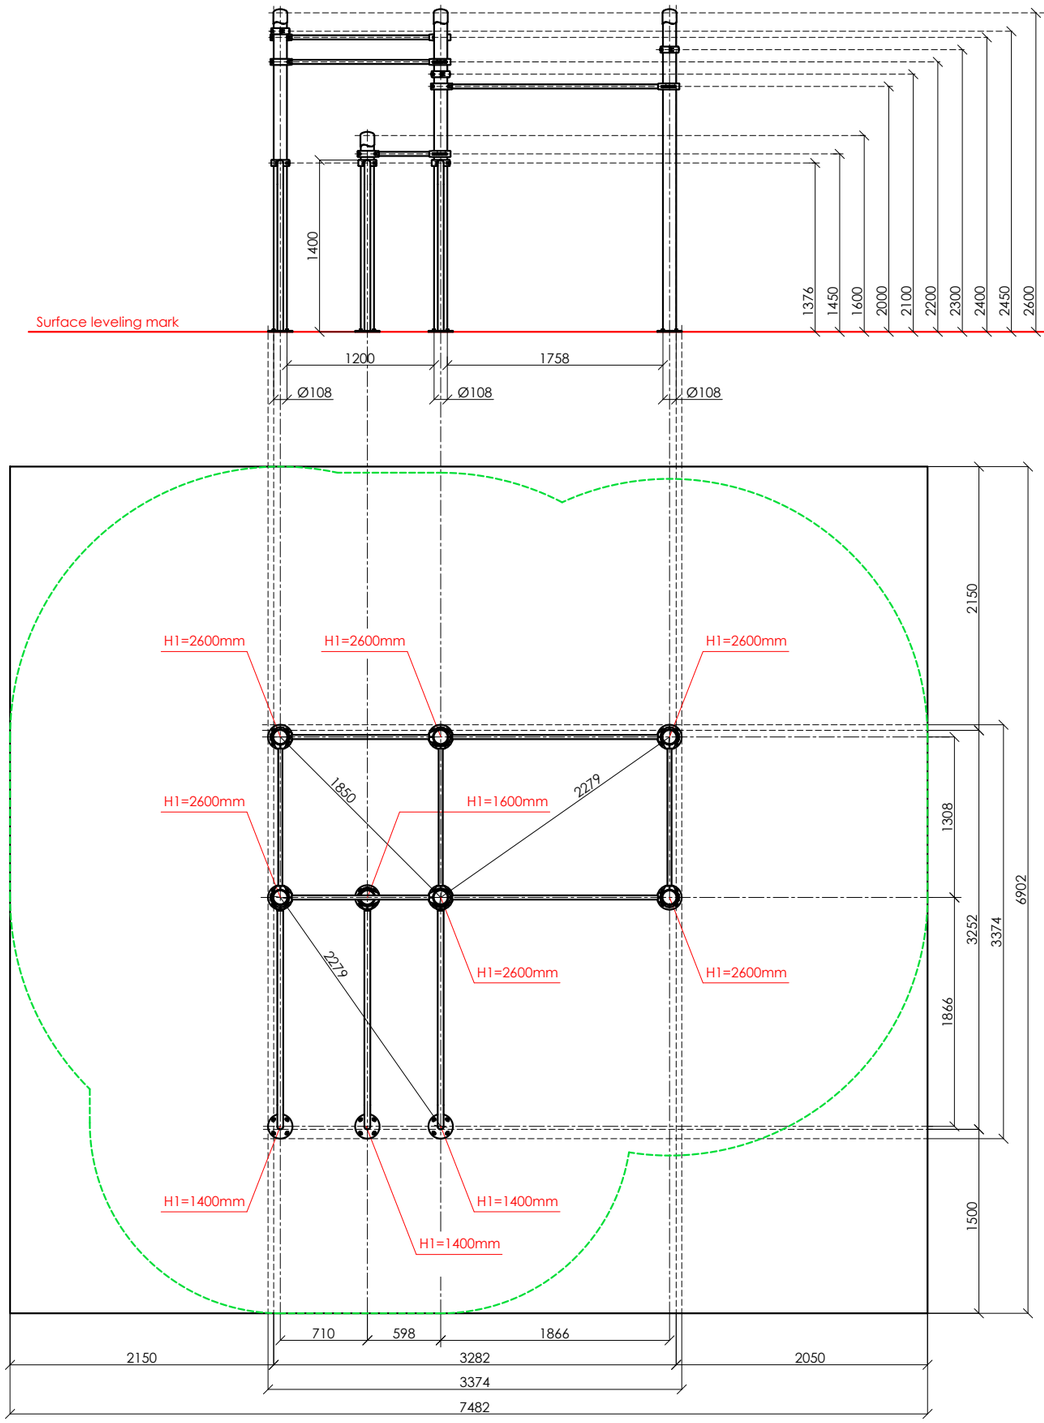


**"KENGURU PRO" LTD**
Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

# D-6 Kenguru INDOOR

The complex consists of seven vertical columns with different height, one crossbar 490 mm in length, four crossbars 1200 mm in length, two crossbars 1758 mm in length, three curved bars and Swedish wall. Height of the Swedish wall – 2073 mm, width – 1200 mm. The distance between the crossbars of the Swedish wall – 407 mm. The distance between the curved bars is 598 and 710 mm accordingly. The horizontal surface of bars is 1590 mm in length. Bars are curved on one side at the angle of 90 degrees and create the parallel bars at the height of 1400 mm from the foundations. Construction is secured together with siluminium clamps.

## Technical information

| | | |
|---|---|---|
| width: | 3252 mm | |
| height: | 2650 mm | |
| lenght: | 3282 mm | |
| largest part: | 2650 mm | |
| weight: | 141.8 kg | |
| floor space required | 7482 x 6902 mm | |
| pipe measurements: | diameter: | wall thickness: |
| | 108 mm | 3.0 mm |
| | 48.3 mm | 3.0 mm |
| | 33.7 mm | 3.0 mm |
| columns Ø108mm: | anodized aluminium profiled pipe AW-6060, powder coated RAL 9006 (White aluminium) | |
| elements: | stainless steel AISI 304, brushed finish | |
| metal clamps: | siluminium, powder coated, RAL 9005 (pure black) | |
| bolts for metal clamps | stainless steel, Pin Hex Button Head Security bolts M10 | |
| max. free fall height: | < 2450 mm | possible underground see DIN 79000:2012-05 Tab.2 or installation instructions |
| user height: | > 140 cm | |
| maximum user weight: | 130 kg | |
| certificates: | | |